

Water Level Indicators (Level & Downhole)/ Mod. BFK-FF


www.pasisrl.it

WATER LEVEL INDICATORS

Water level & downhole indicator with rounded cable, four copper wires, kevlar core and external anti-scratch protective film in transparent PUR.

Graduation in centimeters printed in black, with meter / decimeter indication. While lowering, the bottom sensor piston is open and when the water level is reached both red LED and buzzer turn on. If you continue to lower the probe when it reaches the bottom the piston will close and the green LED will turn on.

- Graduation: 1 cm
- Rounded cable diameter: 5 mm
- Probe diameter: 25 mm, made of stainless steel and plastic (level & bottom)
- Acoustic signal and red LED indicate the water level
- Green LED indicates bottom reached
- External regulating screw for finer regulation
- 1x9V battery, easy external access
- Available lengths: from 30 to 500 m

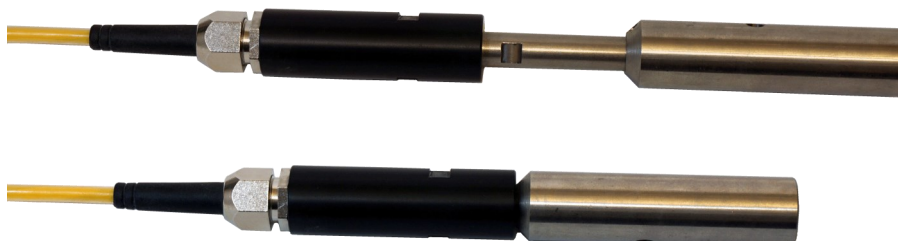

Cable detail ↑

← Bottom Probe detail:

- Piston OPEN
- Piston CLOSED

AVAILABLE BFK-FF MODELS

model	cable length	cable reel	dimension in cm	weight	codie
BFK-FF-30	30m	PVC	L25cm xP18cm xH35cm	1,5	FRE-052-000
BFK-FF-50	50m	PVC	L25cm xP18cm xH35cm	2	FRE-051-000
BFK-FF-100	100m	PVC	L25cm xP18cm xH35cm	3	FRE-053-000
BFK-FF-150	150m	METAL	L32cm xP22cm x H40cm	5	FRE-054-000
BFK-FF-200	200m	METAL	L32cm xP22cm x H40cm	6	FRE-055-000
BFK-FF-300	300m	PVC	L49cm xP36cm x H59cm	13	FRE-059-000
BFK-FF-400	400m	PVC	L49cm xP36cm x H59cm	15	FRE-058-000
BFK-FF-500	500m	PVC	L49cm xP36cm x H59cm	17	FRE-056-000

P.A.S.I. S.R.L. — Via Galliari 5/E — 10125 Torino - Italy
tel. +39 (0)11 6507033 - sales@pasisrl.it - www.pasisrl.it

Specifications subject to change without notice

PAS